

GLOBAL CHAIN

Uses: Designed for use in load binding, towing, logging and many applications requiring higher strength-to-weight ratios than System 4. System 7 meets stringent Department of Transportation regulations with smaller chain that is lighter in weight and easier to handle. **Do not use for overhead lifting.** Minimum elongation 15% Proof tested.

Standard Material: Special high-strength, heat treated steel.

Uses: Excellent general purpose chain of standard commercial quality for all ordinary applications not requiring high strength-to-weight ratios. Frequently used for fabricating tow chains, binding or tie-down chain and logging chains.

Do not use for overhead lifting. Minimum elongation 15% Proof tested.

Standard Material:
Low carbon steel.

TRANSPORT CHAIN



<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
F60-269025	1/4" TRANSPORT CHAIN	(B)
F60-269031	5/16" TRANSPORT CHAIN	(B)
F60-269040	3/8" TRANSPORT CHAIN	(B)
F60-269050	1/2" TRANSPORT CHAIN	(B)

PROOF COIL CHAIN



<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
F60-269104	1/4" PROOF COIL CHAIN	(B)
F60-269105	5/16" PROOF COIL CHAIN	(B)
F60-269106	3/8" PROOF COIL CHAIN	(B)
F60-269108	1/2" PROOF COIL CHAIN	(B)



GLOBAL

CHAIN ACCESSORIES

CLEVIS GRAB HOOKS

<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
F64-264004	1/4" CLEVIS GRAB HOOKS	(B)
F64-264005	5/16" CLEVIS GRAB HOOKS	(B)
F64-264006	3/8" CLEVIS GRAB HOOKS	(B)
F64-264008	1/2" CLEVIS GRAB HOOKS	(B)
F64-264014	1/4" CLEVIS GRAB HOOKS	(B)



CLEVIS SLIP HOOK



<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
F64-264014	1/4" CLEVIS GRAB HOOKS	(B)
F64-264015	5/16" CLEVIS SLIP HOOKS	(B)
F64-264016	3/8" CLEVIS SLIP HOOKS	(B)
F64-264018	1/2" CLEVIS SLIP HOOKS	(B)


<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
F64-246440	1/4" COLD SHUTS	(BA)
F64-246450	5/16" COLD SHUTS	(BA)
F64-246460	3/8" COLD SHUTS	(BA)
F64-246480	1/2" COLD SHUTS	(BA)
F64-246490	5/8" COLD SHUTS	(BA)

COLD SHUTS



GLOBAL CHAIN ACCESSORIES

TURNBUCKLES

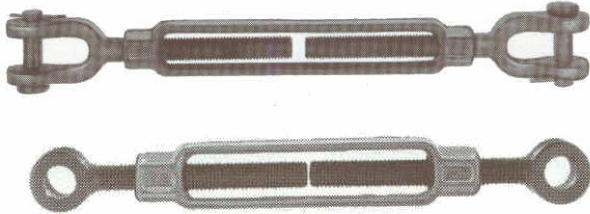


PART #	DESCRIPTION	PACK
F63-212004	5/16 X 4-1/2 EYE/EYE TURNBUCKLE	(B)
F63-212104	5/16 X 4-1/2 JAW/JAW TURNBUCKLE	(B)
F63-213006	3/8" X 6" EYE/EYE TURNBUCKLE	(B)
F63-213106	3/8" X 6" JAW/JAW TURNBUCKLE	(B)
F63-215006	1/2" X 6" EYE/EYE TURNBUCKLE	(B)
F63-215106	1/2" X 6" JAW/JAW TURNBUCKLE	(B)
F63-216106	5/8" X 12" JAW/JAW TURNBUCKLE	(B)
F63-217006	3/4" X 6" EYE/EYE TURNBUCKLE	(B)
F63-217012	3/4" X 12" EYE/EYE TURNBUCKLE	(B)
F63-217112	3/4" X 12" JAW/JAW TURNBUCKL	(B)
F63-219112	1" X 12" JAW/JAW TURNBUCKL	(B)


** Meet federal specifications:
FF-T-791b Tpye 1 form 1 – CLASS 4

QUICK LINKS

PART #	DESCRIPTION	PACK
F64-226440	1/4" QUICK LINK	(C)
F64-226450	5/16" QUICK LINK	(C)
F64-226460	3/8" QUICK LINK	(C)
F64-226480	1/2" QUICK LINK	(C)

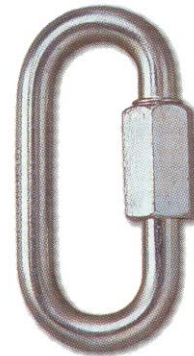

CONNECTING LINKS




PART #	DESCRIPTION	PACK
F64-236440	1/4" CONNECTING LINK	(B)
F64-236450	5/16" CONNECTING LINK	(B)
F64-236460	3/8" CONNECTING LINK	(B)
F64-236480	1/2" CONNECTING LINK	(B)
F64-236490	5/8" CONNECTING LINK	(B)



GLOBAL

CHAIN ACCESSORIES

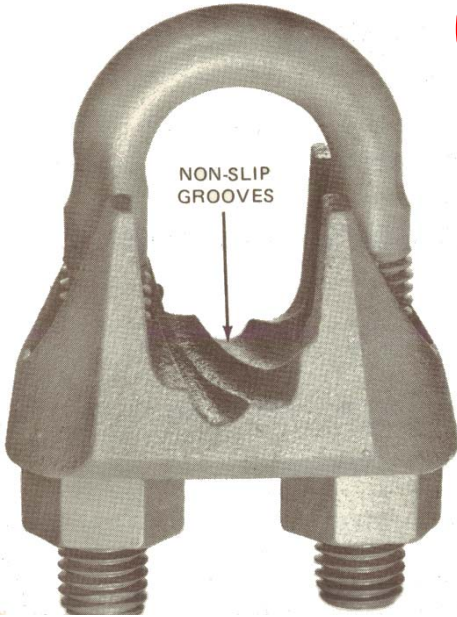

WIRE ROPE CLIP

- “U” bolts manufactured of Special High Carbon Steel
- Clean cut threads
- Refined malleable iron clamps
- Non-slip grooves formed in clamp
- Heavy steel nuts
- **IMPREGNO-PLTD** for maximum protection against rust and corrosion

PROPER METHOD OF ATTACHING WIRE ROPE CLIPS

DEAD END





LIVE END

1. The base of the clip is applied to the live end of the wire rope.
2. The “U” bolt is applied to the dead end of the wire rope.


PART #	DESCRIPTION	PACK
F62-295005	1/4 WIRE ROPE CLIPS	(BA)
F62-295007	5/16 WIRE ROPE CLIPS	(BA)
F62-295009	3/8 WIRE ROPE CLIPS	(BA)
F62-295013	1/2 WIRE ROPE CLIPS	(BA)
F62-295015	5/8 WIRE ROPE CLIPS	(F)
F62-295017	3/4 WIRE ROPE CLIPS	(F)


 1/4" Diameter

 1/2" Diameter

 5/16" Diameter

 5/8" Diameter

 3/8" Diameter

 3/4" Diameter

WIRE ROPE THIMBLES



PART #	DESCRIPTION	PACK
F62-295025	1/4 WIRE ROPE THIMBLES	(BA)
F62-295027	5/16 WIRE ROPE THIMBLES	(BA)
F62-295029	3/8 WIRE ROPE THIMBLES	(BA)
F62-295031	1/2 WIRE ROPE THIMBLES	(BA)
F62-295033	5/8 WIRE ROPE THIMBLES	(F)
F62-295035	3/4 WIRE ROPE THIMBLES	(F)

