

GRD




DRY GRAPHITE

LUBRICATION OF PARTS UNDER HIGH HEAT

LUBRICATION WHERE ELECTRICAL CONDUCTIVITY IS REQUIRED

ELECTRICALLY CONDUCTIVE DRY GRAPHITE IS THE ONLY LUBRICANT THAT SHOULD BE USED FOR THE COLLECTOR RAILS OF OVERHEAD CRANES, SHOES, CONTACTS AND THIRD RAILS. ANYWHERE GREASES AND OILS ARE NOT STAISFACTORY.

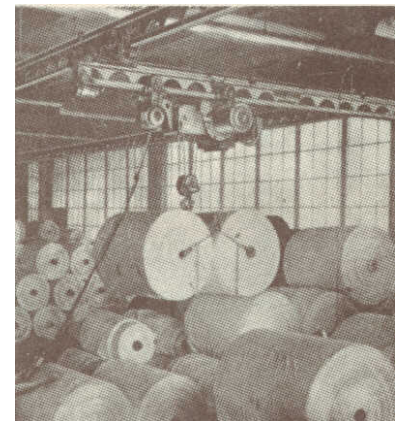

GRD DRY GRAPHITE reduces parts and equipment wear, and cuts maintenance costs

<u>PART #</u>	<u>DESCRIPTION</u>	<u>PACK</u>
U03-249016	GRD DRY GRAPHITE	(D)



FEATURES:

- HIGHLY RESISTANT TO MOISTURE, WATER AND RUST
- WILL NOT BREAK DOWN IN HIGH TEMPERATURE OR BECOME GUMMY
- CLINGS TO MOST SURFACES WITH A MINIMUM AMOUNT OF PRE-TREATMENT
- A GRAPHITE LUBRICANT THAT CAN BE SPRAYED FOR EVEN DISPERSION

FOR USE WHERE:

- A “DRY” GRAPHITE LUBRICANT IS REQUIRED
- PETROLEUM PRODUCTS MUST BE AVOIDED
- TEMPERATURES ARE EXTREME

APPLICATIONS:

- BEARINGS
- CONVEYOR PARTS
- DIE CAST MACHINES
- OVEN PARTS
- ECT
- LOCKS
- FLAT SPRINGS
- VALVES
- SOLENOIDS



GLOBAL INDUSTRIAL PRODUCTS
