

## Bottle Gas Fittings

### Advantages

All fitting pipe threads are made to Dryseal standards. Connectors, unions, nuts and extruded elbows and tees are machined from CA 360 and CA 345 brass.

### Specifications

Bottle gas fittings listed with Underwriters' Laboratories for LP gas systems.

### Temperature and Working Pressure Ranges

From -65°F. to +200°F. at 250 PSI maximum.

### Order

By part number and name.

### Nomenclature

Part numbers are constructed from symbols that identify the style and size of the fitting. The first series of numbers and letters identifies the style and type fitting. The second series of numbers describes the size.

Example, 2002A: Standard POL tailpiece and nut assembly

### Sizes

Pipe sizes are determined by the numbers of sixteenths of an inch in the pipe O.D.

### Pricing


Only items priced in current supplementary price list PL3501 are carried in stock. Price and delivery for non-stock items furnished on request for specified quantity.

## Bottle Gas Fittings

### Tee check 2000

PART NO.	PIPE THREAD T	INTERNAL THREAD T1	C HEX	L	M	N	FLOW DIA. D
2000	1/4-18 NPTF	7/16-24 UNS	5/8	1.25	.62	.87	.156


For dual tank installations.

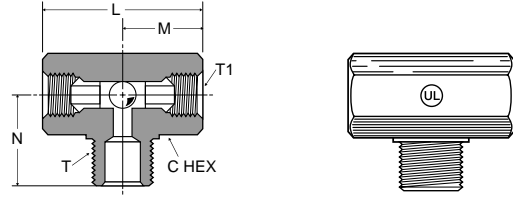

### POL tailpiece & nut assembly 2002AB

\*Thread Protectors


PART NO.	EXTERNAL THREAD	PIPE THREAD	C HEX	L	FLOW DIA. D
2002AB*	.880-14LH	1/4-18 PTF	7/8	2.34	.281

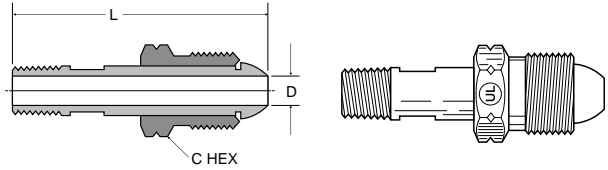

### POL tailpiece & large hex nut assembly 2002ABLH

\*Thread Protectors

PART NO.	EXTERNAL THREAD	PIPE THREAD	C HEX	L	FLOW DIA. D
2002ABLH*	.880-14LH	1/4-18 PTF	1-1/8	2.34	.281

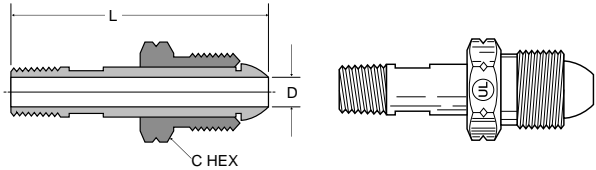

### POL cap with POL female thread 2004


PART NO.	INTERNAL THREAD	C HEX	H	L
2004	.880-14LH	1-1/8	.63	1.12



### Connectors 2005- 2006-2007-2008


Sizes 3/8 flare to 1/4 FPT; 1/2 MPT \*Thread Protectors, +Internal Thread

PART NO.	EXTERNAL THREAD T	STRAIGHT THREAD T1	PIPE THREAD P	C HEX	L	FLOW DIA. D
2005*	.880-14LH	5/8-18	—	7/8	1.97	.281
2006*	.880-14LH	3/4-16	—	7/8	2.09	.281
2007*	.880-14LH	7/8-14	—	7/8	2.22	.281
2008*	.880-14LH	—	1/4-18+	7/8	1.34	.281

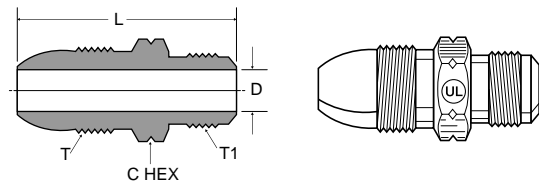

### POL plug with POL male thread 2014

PART NO.	EXTERNAL THREAD	C HEX	L
2014	.880-14LH	7/8	1.34

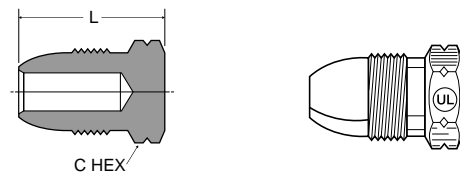

### Cap orifice GF6

PART NO.	STRAIGHT THREAD	C HEX	D	D DRILL	L
GF6-72	3/8-27	1/2	.432	.025	.731
GF6-80	3/8-27	1/2	.432	.013	.731

