

## GLOBAL

### SILICONE HEATER HOSE

#### Silicone Heater Hose Specifications:

##### Temp. Range:

-65° F to +350° F  
(-54° C to +177° C)

Meets SAE J20 R3 Class A specifications.

Nylon fiber reinforced.


Resistant to coolant additives.

For high temperature applications, Nomex® reinforcement is available.

Continuous lengths available upon request.



#### Important Clamping Instructions

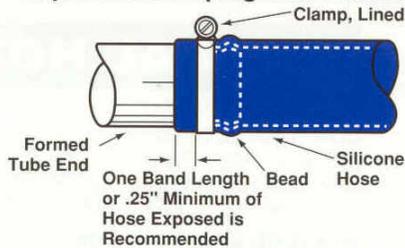

PART #	DESCRIPTION	PACK
I07-252102	1/4 SILICONE HIGH HEAT HOSE	(B)
I07-252106	3/8 SILICONE HIGH HEAT HOSE	(B)
I07-252110	1/2 SILICONE HIGH HEAT HOSE	(B)
I07-252114	5/8 SILICONE HIGH HEAT HOSE	(B)
I07-252118	3/4 SILICONE HIGH HEAT HOSE	(B)
I07-252126	1" SILICONE HIGH HEAT HOSE	(B)

### MARINE FUEL HOSE



#### "Flex-Alcohol" Alcohol Resistant Type A Fuel.

Excellent resistance to fire, heat, ozone, and permeation by alcohol blended gasoline and diesel fuels. Compounded to meet or exceed SAE-J1527

Type A, ISO/DIS 7840, USCG and NMMA standards for fuel feed, fill and vent hoses.

**DESC.** Black with red lettering or stripe.

PART #	DESCRIPTION	PACK
I08-260375	3/8 MARINE FUEL HOSE	(B)
I08-260500	1/2 MARINE FUEL HOSE	(B)
I08-260625	5/8 MARINE FUEL HOSE	(B)
I08-260750	3/4 MARINE FUEL HOSE	(B)
I08-261000	1" MARINE FUEL HOSE	(B)



## GLOBAL INDUSTRIAL PRODUCTS