


GLOBAL

LAYFLAT HOSE

TUBE: Plasticized PVC, smooth, black
REINFORCEMENT: Synthetic fabric
COVER: Plasticized PVC, smooth, weather, ozone, UV resistant.
COLOR: Blue
TEMP. RANGE: -14°F to +150°F
FEATURES: Easy to handle, rolls flat for storage; a better grade than standard PVC blue hose.
APPLICATION: For water discharge in construction, mining, agriculture, irrigation, etc.

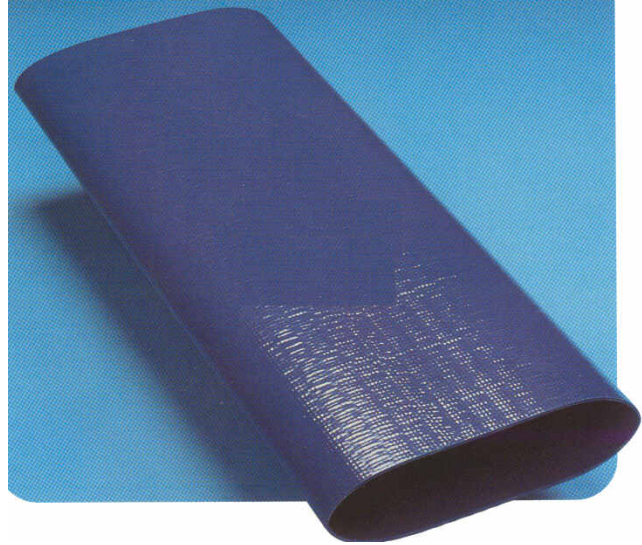

| PART # | DESCRIPTION | PACK |
|------------|-------------------------------|------|
| I14-212100 | 1" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212150 | 1-1/2" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212200 | 2" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212250 | 2-1/2" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212300 | 3" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212400 | 4" LAYFLAT DISCHARGE HOSE | (B) |
| I14-212600 | 6" LAYFLAT DISCHARGE HOSE | (B) |



PVC YELLOW / GREEN SPRAY HOSE

Color:

Yellow, Corrugated finish
 Green, Corrugated finish

Temperature Range:

-10F to +130F

Application:

Agricultural spraying such as insecticides and fertilizers, water compressed air, light chemical collations, pest control, etc.

High Quality:

High adhesion between braid and cover.
 High flexibility and light weight.

| PART # | DESCRIPTION | PACK |
|------------|--------------------------------|------|
| I17-220025 | 1/4 POLY-AG YELLOW 600PSI HOSE | (B) |
| I17-220038 | 3/8 POLY-AG YELLOW 600PSI HOSE | (B) |
| I17-220050 | 1/2 POLY-AG YELLOW 600PSI HOSE | (B) |
| I17-220062 | 5/8 POLY-AG YELLOW 600PSI HOSE | (B) |
| I17-220075 | 3/4 POLY-AG YELLOW 600PSI HOSE | (B) |
| I17-221038 | 3/8 POLY-AG GREEN 800PSI HOSE | (B) |
| I17-221050 | 1/2 POLY-AG GREEN 800PSI HOSE | (B) |
| I17-221075 | 3/4 POLY-AG GREEN 800PSI HOSE | (B) |
| I17-221100 | 1" POLY-AG GREEN 800PSI HOSE | (B) |

