

## GLOBAL

### POLY WIRE HOSE


Heavy wall food and beverage grade vacuum/transfer hose with rated working pressures.

#### Construction:

Crystal clear PVC, formulated to meet applicable FDA, USDA, 3A and NSF criteria and California Proposition 65. Reinforced with helically-wound spring steel wire.

#### Features:

- 29.9" HG vacuum rating
- Spiral wire reinforcement prevents kinking or collapsing....hose diameter will not expand under normal rated working pressures.
- Crystal clear - allows visual confirmation of product flow.
- Glass-smooth interior - reduces material build up.
- Electrogalvanized helical steel wire can be used for static dissipation
- Resistant to chemicals (see chemical-resistance chart)
- Self-extinguishing
- Non-marking
- Non-toxic
- Silicone-free
- Service Temperature Range:  
+25F (-4C) to 150F (+65C)

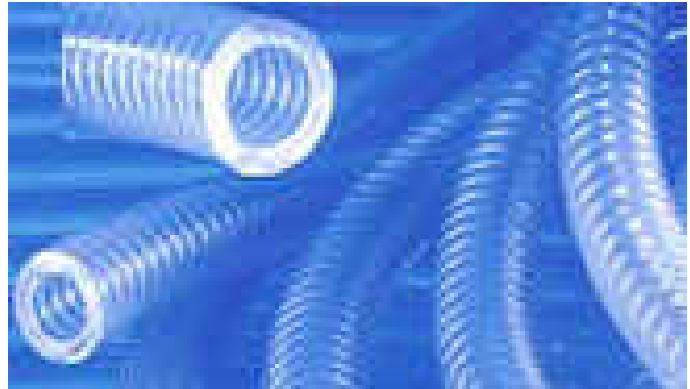

PART #	DESCRIPTION	PACK
111-271304	1/4" POLY WIRE HOSE	(B)
111-271306	3/8" POLY WIRE HOSE	(B)
111-271308	1/2" POLY WIRE HOSE	(B)
111-271312	3/4" POLY WIRE HOSE	(B)
111-271316	1" POLY WIRE HOSE	(B)

#### Applications:

- Full vacuum lines
- Industrial vacuum pumps
- Food & beverage dispensing
- Air and water supply lines
- Pneumatic parts transfer
- Car wash applications
- Coolant lines
- Air breathing lines
- Deionized water systems

